



Stabilizer Bar Instructions and Owners Manual

Fishmaster, Inc.
www.Fishmaster.com
Support@Fishmaster.com

Phone: 877-777-8693
Fax: 877-437-6210

THANK YOU FOR YOUR BUSINESS. IF YOU ARE NOT COMPLETELY SATISFIED IN ANY WAY WITH YOUR STABILIZER BAR PLEASE CONTACT US. Our entire purpose as a company is to offer great products at affordable prices that our customers love.

Please take a few minutes to read the installation instructions and become familiar with the Stabilizer Bar and installation before beginning to ensure a high quality, trouble free installation and use. If you have any questions during your installation give us a call at 877-777-8693 or e-mail Support@Fishmaster.com


IMPORTANT NOTES ON INSTALLING AND USING YOUR STABILIZER BAR

- Read entire manual before installation

Fishmaster, Inc Warranty

Fishmaster warrants this product against manufactures defects for a period of five (5) years. Anodized surfaces are specifically excluded, as their care and use cannot be controlled by the manufacturer. Any modifications or improper use, not approved in writing by Fishmaster shall void this warranty. Fishmaster is not responsible for personal injury or damage to the boat caused by the use of this product. Fishmaster's obligation under this warranty shall not include any transportation charges or costs of installation or any liability for direct, indirect or consequential damages resulting from delay or improper installation. If you need to make a warranty claim contact Fishmaster at 877-777-Tower to receive a return authorization number which is required for all claims. Defects must be reported within 30 days of discovery.

Fishmaster STABILIZER BAR Parts List

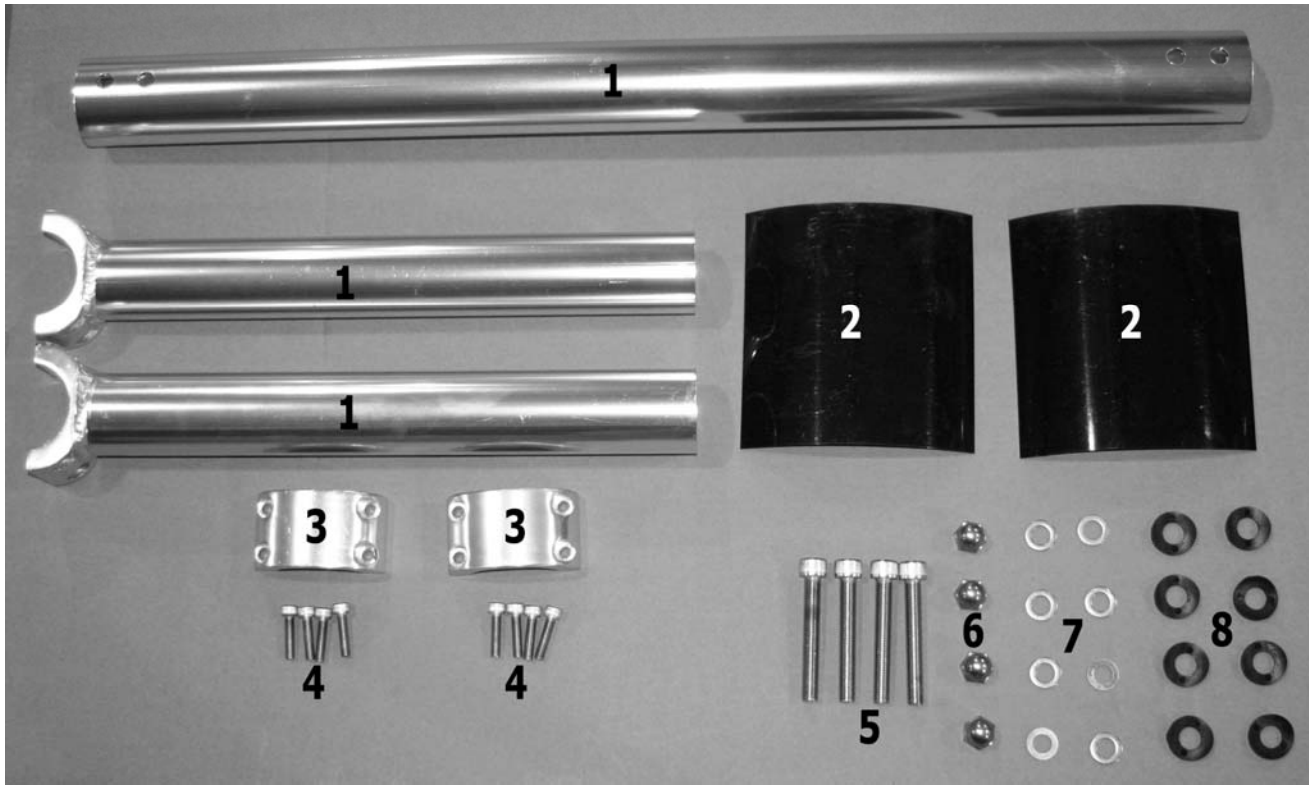

Item	Description
1- Stabilizer Bar	L & R side tubes with one center tube
2- Stabilizer Bar Sleeve	Plastic Sleeve
3- End Caps	End caps to attach stabilizer bar to t-top
4- 8 M6X25 Bolts	Bolts used in the end caps to attach stabilizer bar
5- 4 M-10 Bolts	Bolts used to attach left and right tubes to center tube
6- 4 Acorn Nuts	Nuts used on the M-10 bolts
7- 8 Washers	Washers to secure bolts
8- 8 Plastic Flanges	Beveled



INSTALLATION:

- 1. Slide the Stabilizer Bar end sections into the cross tube while inserting the sleeve into the cross tube. The sleeve is optional.**



- 2. Place Stabilizer bar into the desired position on the t-top.**



- 3. Secure one side with the end cap and bolts.**



4. Make sure Stabilizer Bar is level before securing other side end cap.



5. Make sure that center bar is centered. Drill out 4 holes in stabilizer bar for bolts.



6. Install bolts with washer and flanges and tighten.



The Fishmaster Stabilizer Bar can be attached to the front legs or the rear legs. The Stabilizer Bar can be attached at the top, middle or bottom of the t-top. Where ever additional stability is needed.